




CAMARA ROMPE PRESION T-6		
DESCRIPCION	UBICACION	COTA
CRP6-1	CONDUCCION	2523 MSNM

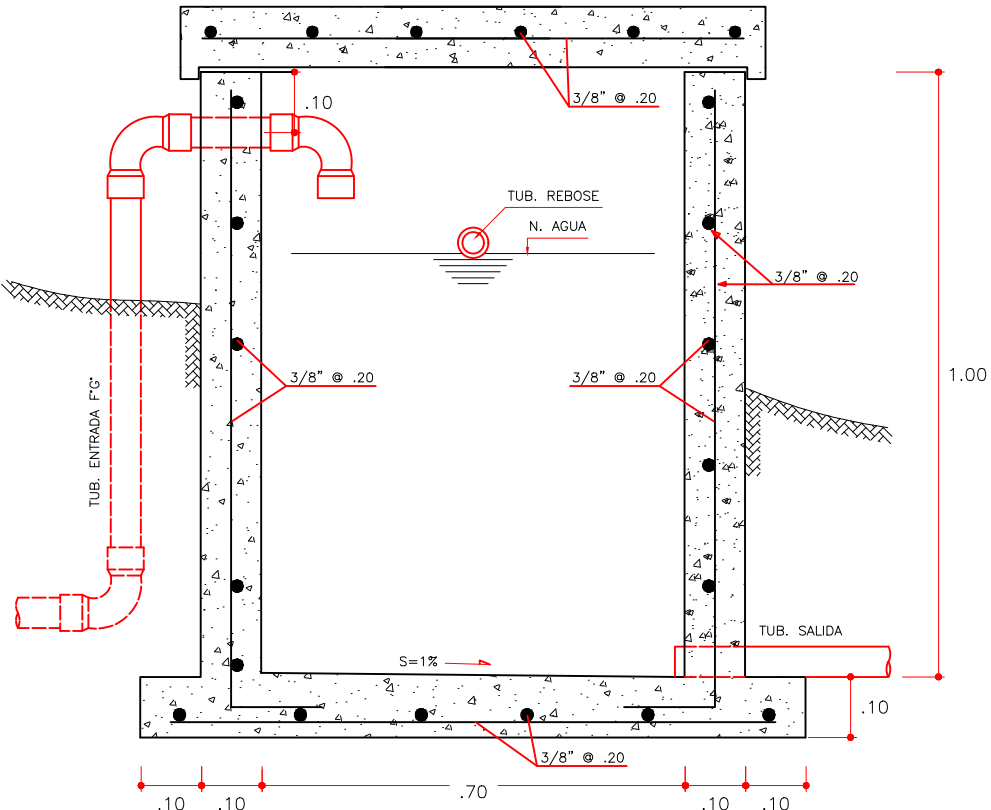


CORTE A-A
ESC: 1/12.5

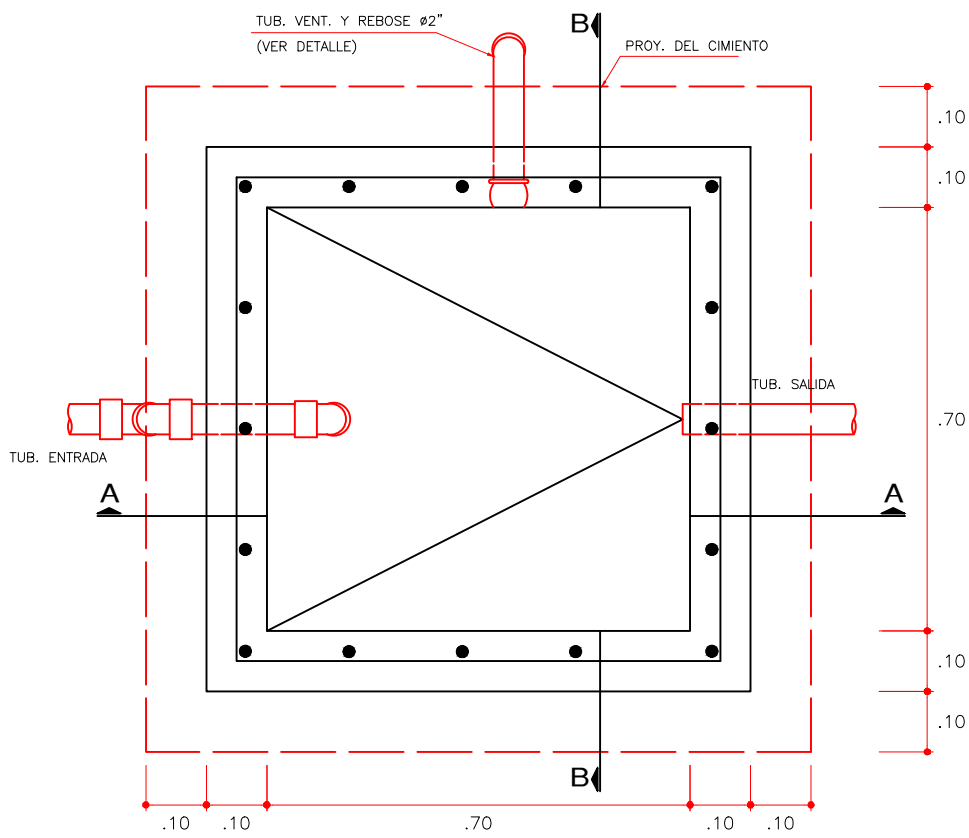

PLANTA
ESC: 1/10

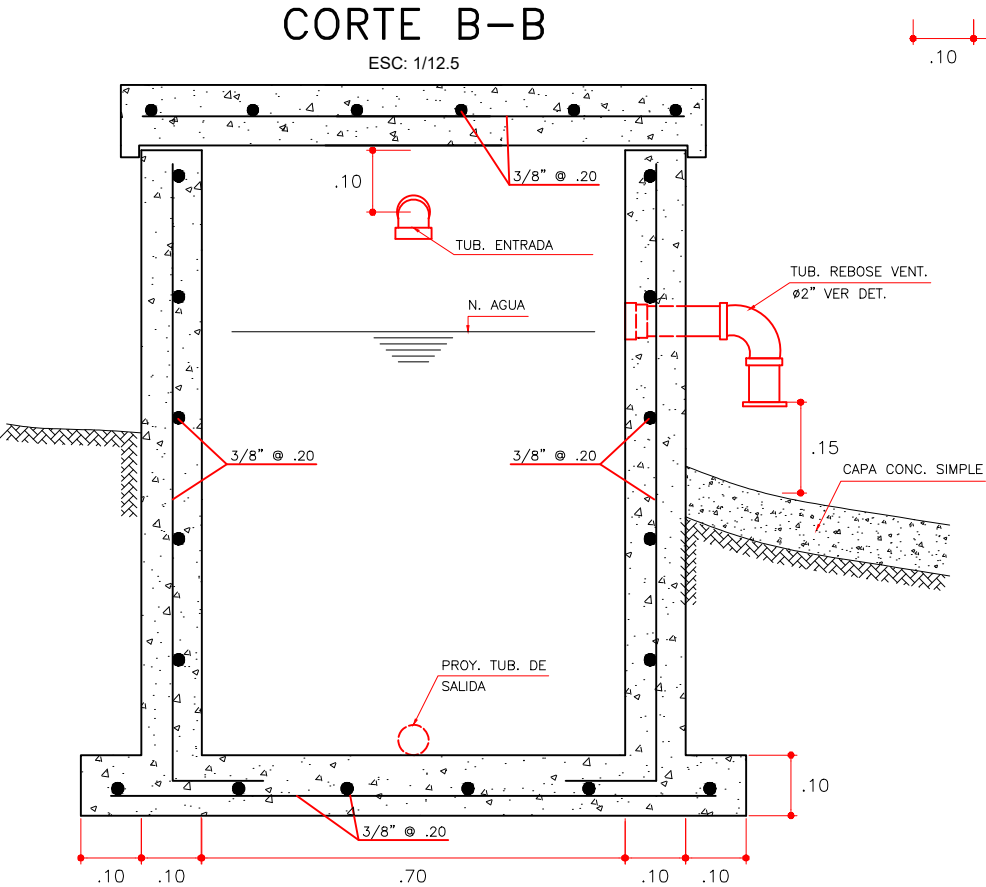

CORTE B-B
ESC: 1/12.5

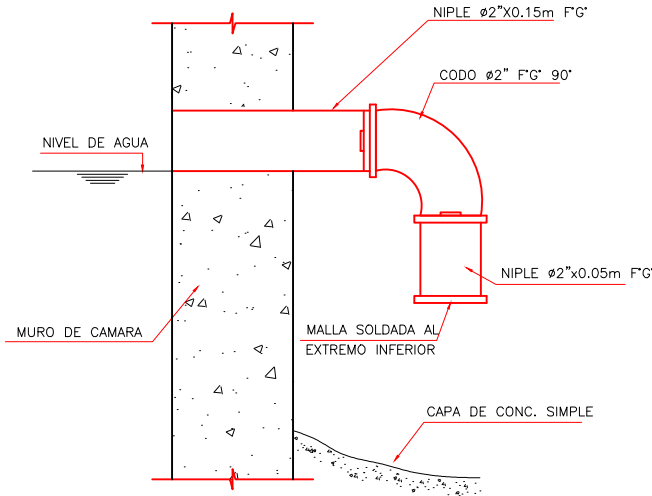

**DETALLE
REBOSE**

ACCESORIOS REBOSE	CANT.
CODO F'G' x 90° ø 1	1
NIPLE F'G' ø 1 X 0.90m	1
NIPLE F'G' ø 1 X 0.15m	1
CODO F'G' x 90° ø2"	1
NIPLE F'G' ø2" X 0.15m	1
NIPLE F'G' ø2" X 0.05m C/MALLA	1

ACCESORIOS POR CRP	CANT.
CODO F'G' ø X 90°	3
NIPLE F'G' ø X 0.90m	1
NIPLE F'G' ø X 0.15m	1
CODO F'G' x 90° ø2"	1
NIPLE F'G' ø2" X 0.15m	1
NIPLE F'G' ø2" X 0.05m C/MALLA	1

ESPECIFICACIONES TECNICAS	
CONCRETO:	f'c= 175 Kg/cm ²
ACERO :	fy= 4200 Kg/cm ²